

# ASPIRE



# TREADMILL

## ROOM TO RUN

A streamlined all-purpose treadmill designed for an approachable performance and lasting reliability. The Aspire treadmill builds on the Life Fitness heritage of advanced biomechanics to deliver smooth, natural movement for exercisers of all levels.



### EXERCISER COMFORT

The Flex Deck® Shock absorption system reduces impact on joints for exercisers. Generous running space and thoughtful features like an integrated accessory tray and side handrails enhance the experience for comfort and confidence.



### INVITING DESIGN

The Aspire cardio line combines modern design with intuitive functionality. A sleek look and two color options allow fitness facilities to enhance their aesthetic while providing cardio equipment that appeals to both workout novices and veteran exercisers.



### OPERATIONAL EFFICIENCY

Simplified interior mechanics make maintenance easier and minimize downtime. Engineered durability provides a long-term value, helping facilities maximize uptime and investment.

ASPIRE TREADMILL




*Life Fitness*

# ASPIRE TREADMILL

## CONSOLE OPTIONS

Choose from the immersive experience of the SE4 Console or get the get-on-and-go functionality of the SL Console.

Both are designed to engage exercisers, simplify operation, and reduce maintenance for facility teams.

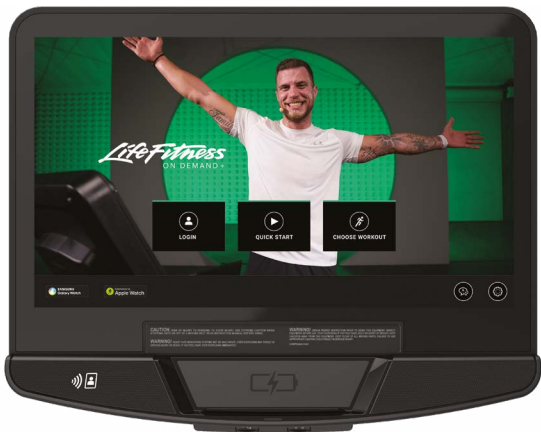

SE4 CONSOLE



SL CONSOLE

### PRODUCT SPECIFICATIONS

| BASE FEATURES                                                                                    |                                   | TECHNICAL SPECIFICATIONS                                                                                                                                                                     |                                      |
|--------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| DX3™ Belt and Deck System (belt tracking system)                                                 | •                                 | Running surface                                                                                                                                                                              | 22 x 60" / (56 x 152 cm)             |
| FlexDeck® 2.0 Shock Absorption System (8 Lifespring shock absorbers)                             | •                                 | Step-up height                                                                                                                                                                               | 10" (25 cm)                          |
| Speed Range                                                                                      | 0.5 - 12 mph<br>(0.8 - 20 km/h)   | Max user weight                                                                                                                                                                              | 400 lbs (181 kg)                     |
| Rollers: 3.5" (9 cm) precision crowned steel rollers, front and back                             | •                                 | Length                                                                                                                                                                                       | 83.5" (212 cm)                       |
| Incline                                                                                          | 0-15%                             | Width                                                                                                                                                                                        | 36" (91 cm)                          |
| Motor System: 4-HP AC Continuous Duty (8-HP Peak Duty) Motor. Motor efficiency rated IE2 at 2-HP | •                                 | Height                                                                                                                                                                                       | 58" (147 cm)                         |
| Side handrails                                                                                   | 20" (51 cm)                       | Unit weight                                                                                                                                                                                  | 375 lbs (170 kg)                     |
| Molded-in cup holders                                                                            | 2                                 | POWER REQUIREMENTS                                                                                                                                                                           |                                      |
| Integrated accessory tray                                                                        | 3.6" (9 cm) deep                  | All treadmills should be installed with a dedicated electrical circuit. 120V, 20A or 230V, 10A; Japan 100V, 20A or 200V, 10A (may vary per country). Consult the assembly manual for details |                                      |
| FRAME                                                                                            |                                   | WARRANTY*                                                                                                                                                                                    |                                      |
| Plastic lower side rails and end caps                                                            | •                                 | Parts and Labor - Visit <a href="https://www.lifefitness.com/warranties">LifeFitness.com/warranties</a> for warranty details                                                                 | 3 Years                              |
| Front wheels for easy mobility                                                                   | •                                 | PRODUCT MODEL / SKUS                                                                                                                                                                         |                                      |
| Adjustment levelers for product stability                                                        | •                                 | SE4 Console                                                                                                                                                                                  | ASPT-SE424 (24")<br>ASPT-SE416 (16") |
| Quick-release removable shroud for simple serviceability                                         | •                                 | SL Console                                                                                                                                                                                   | ASPT-SL                              |
| Robust paint (corrosion, stain, and chemical resistant coating)                                  | •                                 |                                                                                                                                                                                              |                                      |
| Color options                                                                                    | Arctic Silver,<br>Smooth Charcoal |                                                                                                                                                                                              |                                      |